



优钻地质材料供应有限公司

PRE-MAT DRILLING SUPPLIES PTE LTD

Co Reg. No. 199900213-K GST Reg. No. 19-9900213-K


No. 48 Toh Guan Road East #06-107 Enterprise Hub, Singapore 608586

Tel: (65) 6861 5323 Fax: (65) 6861 0882 Mobile: (65) 9633 1617 / (65) 9665 2712


Email: enquiry@premat.com.sg Website: <http://www.premat.com.sg>

JAPANESE DESIGN GROUTING/FLUSHING PUMP


TOHO GROUT PUMP (JAPAN)		BG-20B		BG-15B		BG-10C		BG-5C	
TYPE		Duplex Piston Pump, Double Acting		Duplex Piston Pump, Double Acting		Duplex Piston Pump, Double Acting		Single Piston Pump, Double Acting	
PISTON DIAMETER	mm	105	90	90 *	80	80 *	70	80 *	70
DISCHARGE CAPACITY	litre/min	300	217	200	157	120	91	70	53
WORKING PRESSURE	kg/cm ²	23	32	22	32	29	38	24	32
STROKE LENGTH	mm	105		85		60		60	
DIMENSIONS(LxWxH)	mm	2250 x 805 x 1155		2130 x 525 x 1155		1900 x 565 x 1050		1610 x 600 x 715	
WEIGHT (EXCLUDING POWER UNIT)	kg	860		685		370		205	
POWER UNIT	kW-P	15.0 kW-4P		11.0 kW-4P		7.5 kW-4P		3.7 kW-4P	
	PS	20		15		10		5	

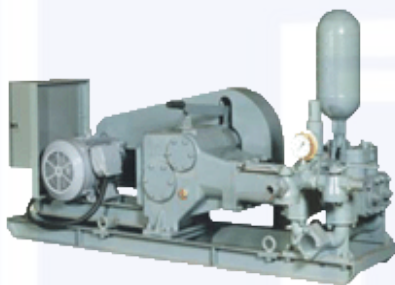

BG-15B c/w Electric

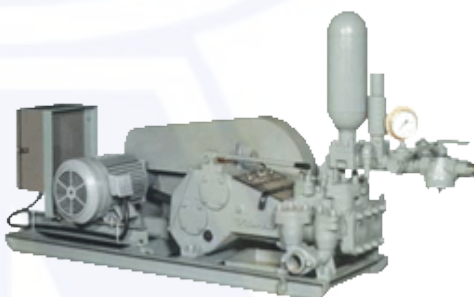

BG-10C c/w Electric

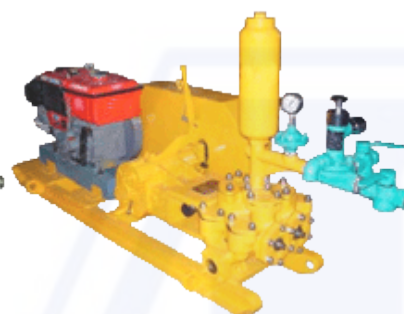

PMG-10 Fitted with Diesel

PMG GROUT PUMP (MADE IN MALAYSIA)

PISTON SIZE	mm	45	52	68	85	89	100
PMG-5A With Engine							
DISCHARGE	litre/min	35	45	80 *			
PRESSURE	kg/cm ²	60	40	20 *			
PMG-5A With Motor							
DISCHARGE	litre/min	28	40	70 *			
PRESSURE	kg/cm ²	60	40	20 *			
PMG-10 With Engine							
DISCHARGE	litre/min	54	70	120 *			
PRESSURE	kg/cm ²	70	50	30 *			
PMG-10 With Motor (follow above specs with the Engine)							
DISCHARGE	litre/min	45	60	100 *			
PRESSURE	kg/cm ²	30	50	70 *			
PMG-20A With Engine							
DISCHARGE	litre/min				210	240	330 *
PRESSURE	kg/cm ²				37	34	22 *
PMG-20A With Motor							
DISCHARGE	litre/min				210	230	300 *
PRESSURE	kg/cm ²				37	34	22 *

* Pump will be fitted with piston size (Highlighted Value), unless upon request